

**MSP**  
**5000**NON REGULATED  
COUNTRIES

# PRODUCT INFORMATION



## KEY FEATURES

Free air delivery	m <sup>3</sup> /min (cfm)	5,0 (180) - 4,6 (165) - 4,2 (148)
Working pressure	bar (psi)	7 (100) - 8,5 (123) - 10 (145)
Max. sound power level	db(A) LWA	98
Fuel consumption at full load	l/h	8,75
Oil tank for storage and separation capacity	L	34
Suction air filter with silencer, reusable standard cartridge	qty	2
Compressed air outlets		1x1" + 2 x 3/4"

## ENGINE

Brand		KUBOTA
Type		V1505-T
Number of cylinders		4
Power at full load	kW (hp)	31,2 (41,8)
Rotation speed - full load	tr/mn	3000 - 2800 - 2600
Rotation speed - idling	tr/mn	1900 - 1900 - 2000
Fuel type		Diesel
Cooling type		Water
Fuel tank capacity	L	70

## COMPRESSOR

Pneumatic suction valve		✓
Safety valve calibrated for suitable service pressure		✓
Coupling type		Direct
Oil capacity	L	15

## BATTERY

Voltage	V	12
Capacity	Ah	70
Starting current	A	640

## COOLING & LUBRICATION

Air cooling with light alloy radiator, designed to operate safely in a temperature range from -10°C up to +50°C	✓
Fan mounted on the engine water pump, ensuring optimum cooling	✓
Oil tank for storage and separation including separator element	✓

## START-UP

Electric	✓
Closed valve empty start managed automatically	✓

## REGULATION

Progressive air flow regulation from idling up to full load, thanks to both engine speed and air intake regulation	✓
Automatic unloading phase at engine stop	✓

## CONTROL PANEL

Pressure gauge on compressed air outlet	✓
Hour-meter	✓
Key switch for secure storage and compressor start	✓
ON/OFF LED	✓
Engine pre-heating LED	✓

**MSP**  
**5000**NON REGULATED  
COUNTRIES

# PRODUCT INFORMATION

## SAFETY DEVICES

Monitoring functions with automatic stop	✓
High air-end temperature	✓
Low engine oil pressure	✓
High cooling water	✓

## FRAME



Painted and soundproofed steel body	✓
Hinged hood with 2 gas springs	✓
Removable canopy panels	✓
External central hoist ring which simplifies handling	✓
Engine and air-end mounted on anti-vibration pads to absorb vibrations	✓
Exhaust silencer inside the enclosure = protection against shocks	✓
Fan protection guard as standard	✓
Belt protection guard as standard	✓
Frame with torsionally rigid floor	✓

## OPTIONS

Ball coupling CE94/20	✓
Integrated 1.0 L line lubricator on all outlets or remote	✓
Hose reel (fitted hose 20m)	✓
Customer colors (RAL)	✓
Skid-mounted	✓
Braked axle	✓
Axle-mounted with spillage-free frame and forklift handling	✓
Remote drain	✓
Integrated/separate water separator	✓
After cooler	✓



## UNBRAKED AXLE

Tires		155/70 R13
Tire pressure	bar	2,5
Adjustable towbar		✓
Length with unbraked axle and min/max towbar (A)	mm	2923
Width (B)	mm	1326
Height with closed (C)	mm	1400
Weight axle-mounted	kg	750
Gross combination weight rating	kg	750
Load ring	kg	20-50

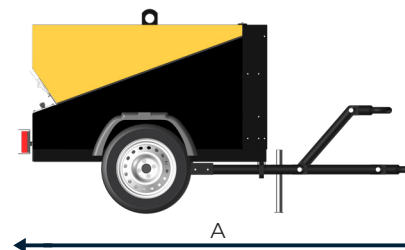

## FRAME COMPRESSOR

Length (X)	mm	1820
Width (Y)	mm	904
Height (Z)	mm	1205
Weight	kg	700



## STANDARDS

All technical specifications are in accordance with the requirements of below listed EC directives.  
2006/42/EC = Machinery Directive - 2009/105/EC = Simple Pressure Vessels Directive - 2000/14/EC = Noise Emission of Outdoor Equipment Directive